

ID Material: 40  
Rble: R. Antich  
Revision: 6  
Last updated: 31/07/2021

# MM

MM is designed for heavy duty industrial brake applications. It consists a resin of impregnated textile based material with metal components. MM has a good mechanical resistance, is fully cured and suitable for bonding and riveting.

## Material data

### Friction Properties (according graphics)

Static Friction Coefficient (15bar, from box):	0.45±0.05	μ
Static Friction Coefficient (15bar, 100°C):	0.50±0.05	μ
Dynamic Friction Coefficient:	see charts	
Wear Rate:	see charts	
T° Fading:	>200	°C

### Physical properties

Hardness (DIN53505):	90±5	Shore-D
Specific Gravity (ASTM D792):	1.6±0.05	gr/cm3
Ignition Loss (ASTM D7348):	20±2	%
Acetone Extraction (ASTM D494):	3±0.2	%

### Mechanical properties


Tensile Strength (ASTM D638):	47±5	N/mm <sup>2</sup>
Compressive Strength (ISO 844:2014):	410±5	N/mm <sup>2</sup>
Shear Modulus (ASTM D2344-00):	5320±100	N/mm <sup>2</sup>
Poisson Coefficient (ASTM D638):	0.255	
Young Modulus (ASTM D638):	13354±100	N/mm <sup>2</sup>

### Recommended Working Values

T° Max. Continuous Operation:	200	°C
T° Max. Intermittent Operation:	250	°C

Material type : Rigid material

### Appearance / Formats



### Applications





Forging machinery - Heavy duty static applications - Heavy-duty industrial machinery - Holding Mechanical Structures - Machinery Mining industries

Price Level : € € €

Reach (EC)1907/2023 - RoHS 2015/863/EU : Compliance

### Others

Recommended Mating Surface:	Perlitic cast iron, hardness HB150-200
Recommended Adhesives:	Thermosetting adhesive
Oil Resistant:	Yes

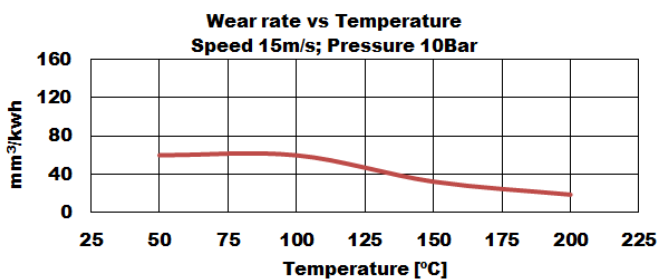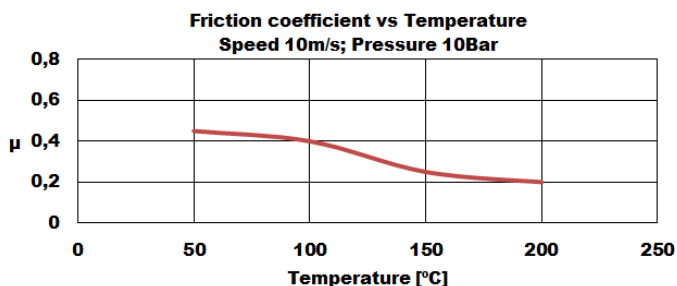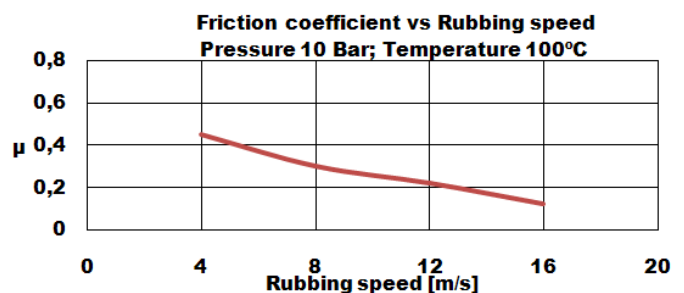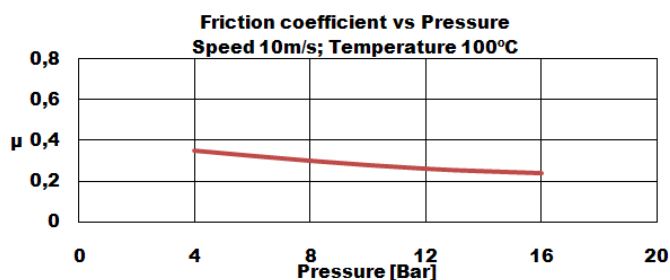

Rubbing speed, temperature and pressure are related. Changing any values will change other. The values shown represent typical conditions, but are not ultimate limits of the material.