

ID Material: B9  
Rble: R. Antich  
Revision: 6  
Last updated: 04/08/2021

# DD01

DD01 is molded black friction material. The basic materials which are used are: phenolic resins and NBR as the bonding system. Reinforced with a high volume of short cut fibres which help to reach a very good mechanical and frictional performance. It is fully cured material and is suitable for bonding and riveting.

## Material data

### Friction properties (according graphics)

Static Friction Coefficient (15bar, from box):	0.35±0.05	μ
Static Friction Coefficient (15bar, 100°C):	0.50±0.05	μ
Dynamic Friction Coefficient:	see charts	
Wear Rate:	see charts	
T° Fading:	>350	°C

### Physical properties

Hardness (DIN53505):	80±5	Shore-D
Specific Gravity (ASTM D792):	2.05±0.05	gr/cm3
Ignition Loss (ASTM D7348):	35±2	%
Acetone Extraction (ASTM D494):	2±0.2	%

### Mechanical properties


Tensile Strength (ASTM D638):	19±5	N/mm <sup>2</sup>
Compressive Strength (ISO 844:2014):	110±5	N/mm <sup>2</sup>

### Recommended Working Values

T° Max. Continuous Operation:	250	°C
T° Max. Intermittent Operation:	350	°C

Material type : Rigid material

### Appearance / Formats



### Applications

Brake pads - Friction washers - Gear discs for industrial devices - Rings segments for machinery

Price Level : € € €





Reach (EC)1907/2006 - RoHS 2011/65/EU : Compliance

### Others

Recommended Mating Surface: Perlitic cast iron, hardness HB150-200

Recommended Adhesives: Thermosetting adhesive

Oil Resistant: Yes

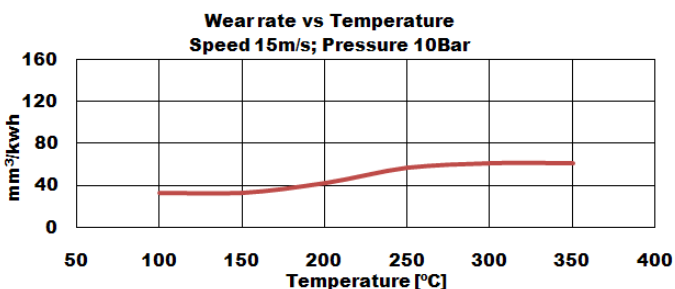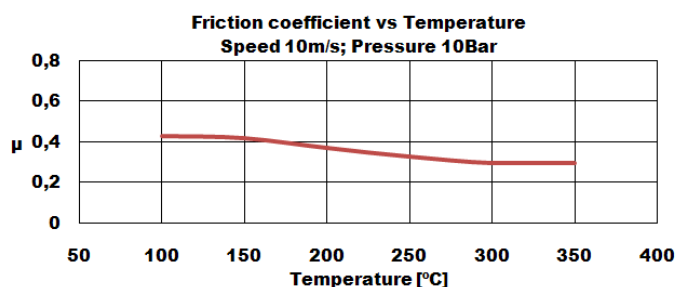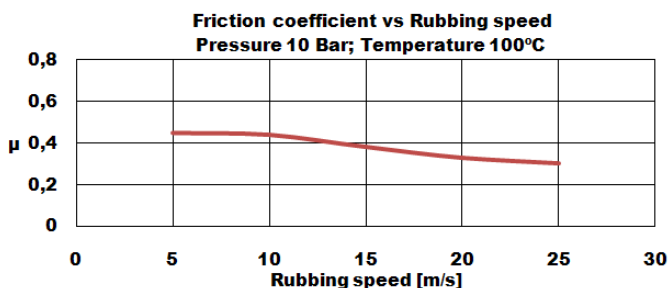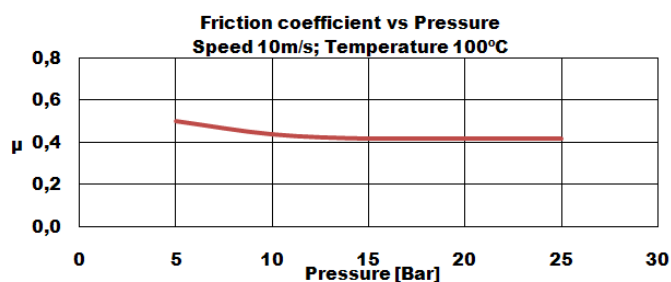

Rubbing speed, temperature and pressure are related. Changing any values will change other. The values shown represent typical conditions, but are not ultimate limits of the material.