

ID Material:  
Rble: R. Antich  
Revision: 5  
Last updated: 16/05/2018

# MM-MEX

MM-MEX is designed for heavy duty industrial brake applications. It consists a resin of impregnated textile based material with components. MM-MEX has an exceptional mechanical resistance, is fully cured and suitable for bonding and riveting.

## Material data

### Friction properties (according graphics)

Static Friction Coefficient (15bar, from box):	0.37±0.05	μ
Static Friction Coefficient (15bar, 100°C):	0.47±0.05	μ
Dynamic Friction Coefficient (10bar, 10m/s):	0.30±0.05	μ
Wear Rate (10bar, 15m/s):	30±10	mm <sup>3</sup> /Kwh
T° Fading (10bar, 10m/s):	>250°C	°C

### Physical properties

Hardness (DIN53505):	90±5	Shore-D
Specific Gravity (ASTM D792-91):	1.45±0.05	gr/cm <sup>3</sup>
Ignition Loss (ASTM D-2524):	30±2	%
Acetone Extraction ISO2859-1:	3±0.2	%
Thermal Conductivity (ASTM E1952-01):	0.3±0.01	W/m°K

### Mechanical properties

Tensile Strength (ASTM D638-10):	73±5	N/mm <sup>2</sup>
Compressive Strength (UNE 53205):	361±5	N/mm <sup>2</sup>
Poisson Coefficient:	0.19±0.03	
Young Modulus (ASTMD 638-10):	8432±100	N/mm <sup>2</sup>

### Recommended Working Values

T° Max. Continuous Operation:	200	°C
T° Max. Intermittent Operation:	250	°C

Material type : Rigid material

### Appearance / Formats



Sheets

### Applications





Forging machinery - Heavy duty static applications - Heavy-duty industrial machinery - Holding Mechanical Structures - Machinery Mining industries -

Price Level : € € €

Reach (EC)1907/2006 - RoHS 2011/65/EU : Compliance

### Others

Recommended Mating Surface:	Perlitic cast iron, hardness HB150-200
Recommended Adhesives:	Thermosetting adhesive
Oil Resistant:	Yes

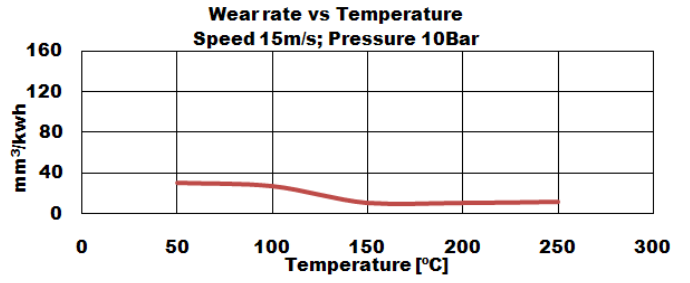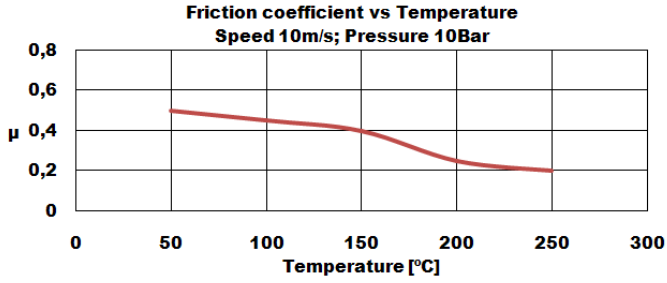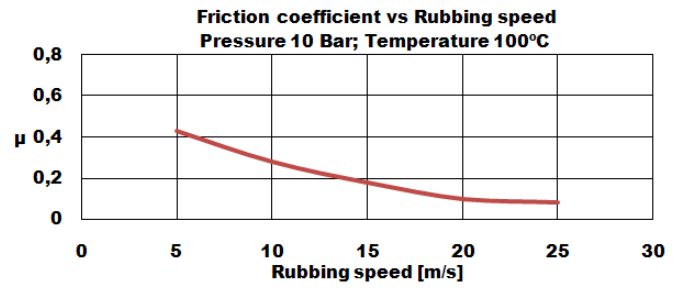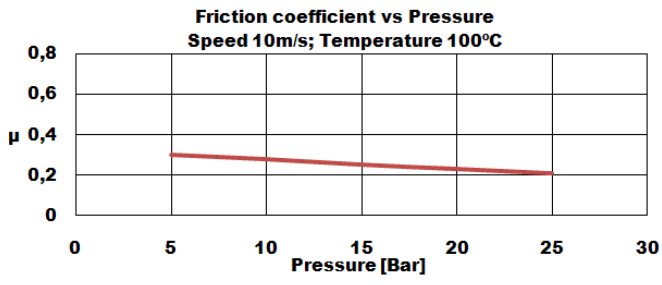

Rubbing speed, temperature and pressure are related. Changing any values will change other. The values shown represent typical conditions, but are not ultimate limits of the material.